



**LUNO
SYSTEMS**



AIRMASTER 4TM LIFE SUPPORT SYSTEM CONTROL PANEL SET



AIRMASTER 

LIFE SUPPORT SYSTEM CONTROL PANEL SET

AIRMASTER 4TM

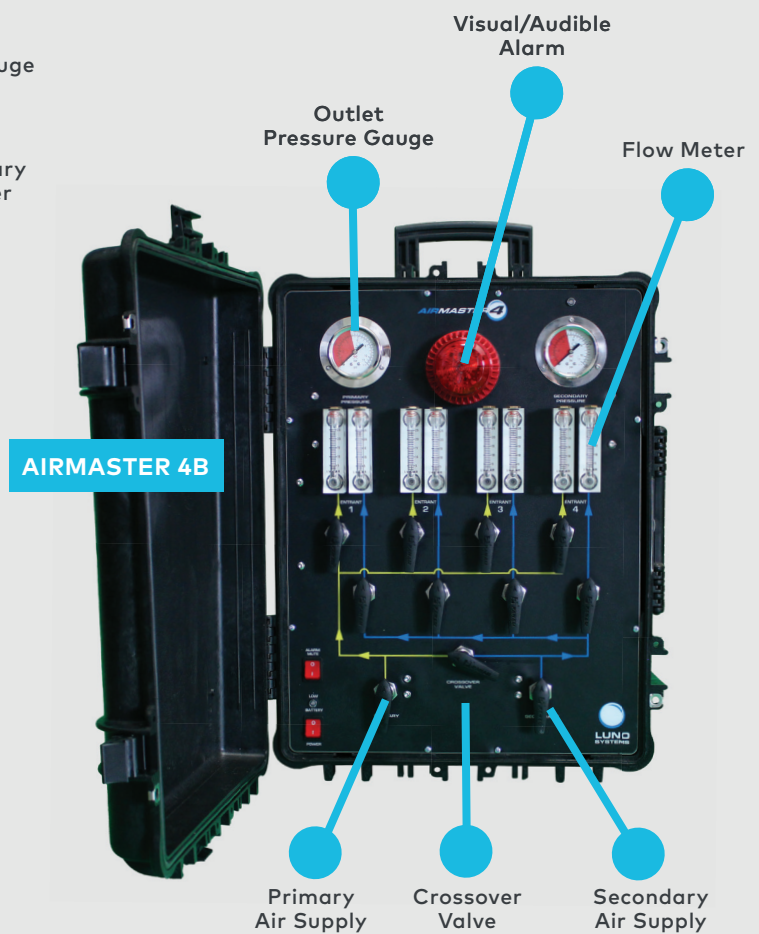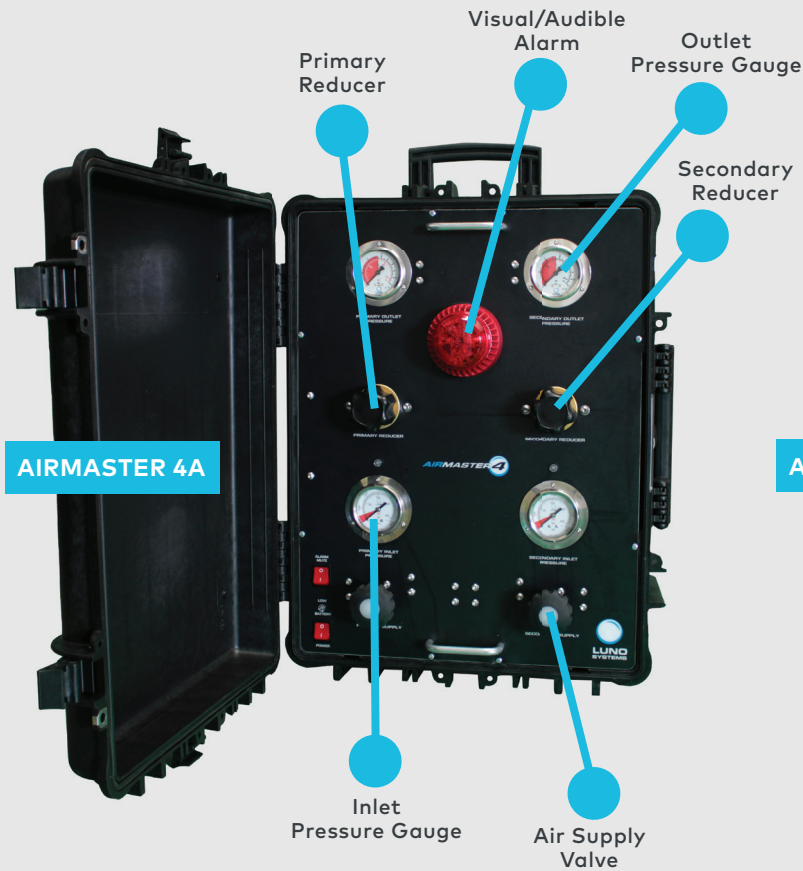

Constructed from the best materials possible, the Airmaster 4TM is a no compromise solution for managing life support breathing systems.

Featuring Stainless steel panel and pipework, and mounted inside lifetime warranty ExplorerTM cases the A and B panels will give durability for harsh industrial environments.

The control panels provide capacity for up to 4 users simultaneously, providing each with 2 independent air supplies; Primary and Secondary.

The A panel designed to be positioned at the bottom of the reactor and the B panel on the reactor top which means only the interface umbilical is trailed up to the reactor and then split out to up to 4 users with the B panel.

The A panel is designed for handling 2 high pressure supplies and a 3rd low pressure compressor supply if necessary. The A panel is fitted with a pressure regulator on each line which can be adjusted to ensure users are supplied with adequate pressure.


Each line is equipped with an isolation valve on the B panel, and flowmeter which indicates breathing. An integral audible and visual alarm beacon warns of low pressure in the cylinder banks, and an LED illuminates on the supply that has failed.

Normally the system will be used in conjunction with a communication system – the interface umbilical contains a comms cable.

Approved to the Pressure Equipment Directive 97/23/EC and EN14593-1, the system is engineered to comply in demanding industrial environments, where chances cannot be taken.

LIFE SUPPORT SYSTEM CONTROL PANEL SET

Typical Configuration Options

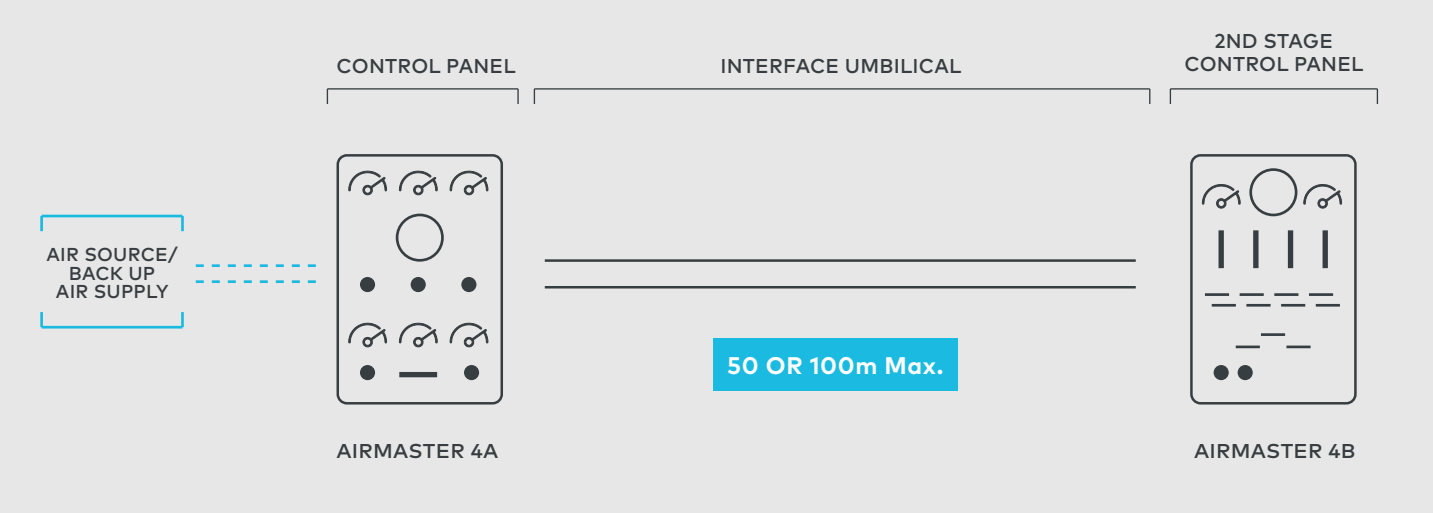

CONTROL PANEL	
20016	AIRMMASTER 4A
20017	AIRMMASTER 4B

INTERFACE UMBILICAL	
20018	50m
20019	100m

UMBILICAL	
See UMBILICALS product sheet	

HELMET	
See HORNET product sheet	



SPECIFICATION

	AIRMASTER 4
Number of Simultaneous Users	4
Pipework Construction	Stainless
Panel Construction	Stainless mounted in Explorer case
Alarm System	24v alarm <95dba @1m. Audible and visual (3x9v battery)
Interface Umbilical	2x airline, 1x comms cable, 1x restraint cable, overjacketed
Umbilical Lengths	25m, 50m, 75m, 100m
Approval	PED 97/23/EC, EN14593-1 CE Certified
Weight	A Panel:23kg B Panel: 20kg
External Size	Each Panel 250x500x 650mm