


FLOWMASTER[™] FRESHAIR BREATHING APPARATUS



FLOWMASTER™ FRESH AIR BREATHING APPARATUS

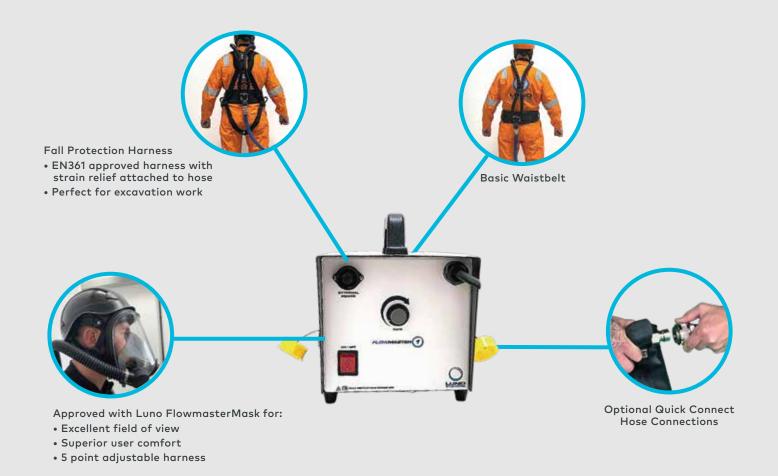

The Flowmaster fresh air breathing apparatus system is designed to provide a constant flow of fresh air to users working in environments where the air may be unsafe, but can be drawn from a nearby source to supply users with safe air.

The Flowmaster range offers several options to ensure that users can use the best suited equipment to their specific requirements giving the option of battery powered assisted options through to unassisted.

The range leading Flowmaster 2 integrates a re-chargeable battery and alarms to ensure that users can work free from trailing leads, but are warned of low battery condition, blocked pre-filters or other issues with the unit.


A range of harness options ensures that users can select the most comfortable and appropriate option for their work environment with the inclusion of a EN361 approved option for excavation related tasks, as well a full body comfort harness for long duration tasks where users need to work comfortably.



FLOWMASTERTM FRESH AIR BREATHING APPARATUS



Typical Configuration Options

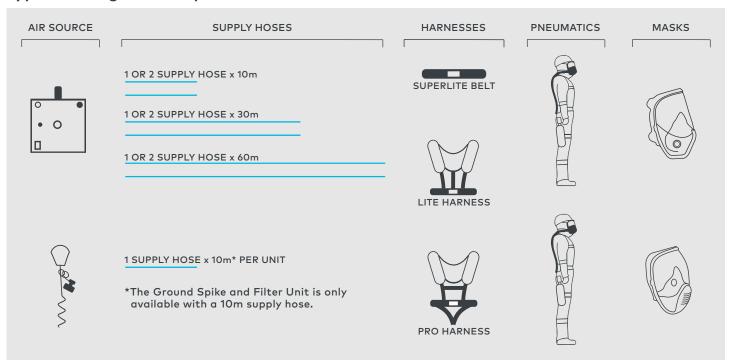

AIR SOURCE			
20500	FLOWMASTER 1 BLOWER UNIT		
20535	FLOWMASTER UNASSISTED		
APPARA	ATUS		
20524	FLOWMASTER VISION 2 PNEUMATICS		
20508	FLOWMASTER FLOWMASK PNEUMATICS		
HARNE	SSES		
20522	SUPERLITE BELT		
20525	FLOWMASTER LITE HARNESS		
20523	FLOWMASTER PRO HARNESS		
ACCESS	SORIES		

FLOWMASTER APPARATUS HOLDALL

HEAVY DUTY MASK BAG

FLOWMASTER TROLLEY FOR UP TO 60 M HOSE

11280

11384

11283

HOSES	
LSBAH007-10M	10m HOSE
LSBAH007-30M	30m HOSE
LSBAH007-60M	60m HOSE

MASKS	
20527	VISION 2 MASK - SMALL
20526	VISION 2 MASK - MEDIUM
20549	VISION 2 MASK - MEDIUM/LARGE
20503	FLOWMASK - SMALL
20504	FLOWMASK - MEDIUM
20505	FLOWMASK - LARGE

Note: Flowmaster Vision Pneumatics are only compatible with Vision 2 Masks. Flowmaster Flowmask Pneumatics are only compatible with Flow Masks. The 3 harness options can be used on either Vision or Flowmask systems.



SPECIFICATION

	FLOWMASTER 1	FLOWMASTER UNASSISTED
Electrical Connection	110V	N/A
Dimensions	190 x 270 x 190 mm	N/A
Weight	5.5kg	N/A
Flowrate	Min 120lpm	Min 120lpm
Protection	IP64	IP64
Hose Lengths	up to 60M	up to 10M
Hose Material	PVC	PVC
Approval	EN138	EN138
Rechargeable Battery	No	No
Number of Users	2	1



